




NOTES:

1. SINGLE ENCLOSURE IS 12' WIDE (INTERIOR)
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL
3. GREASE/TALLOW BIN ENCLOSURE MAY BE ATTACHED TO THE TRASH ENCLOSURE OR BE CONSTRUCTED SEPARATELY. THE GREASE/TALLOW BIN MUST NOT BE LOCATED WITHIN THE TRASH/RECYCLING ENCLOSURE.
4. NO. 4 REBAR, 12 INCHES O.C. EACH WAY, 3 INCH DOBIES WITH WIRE TIES AT 3' INTERVALS, EACH WAY.

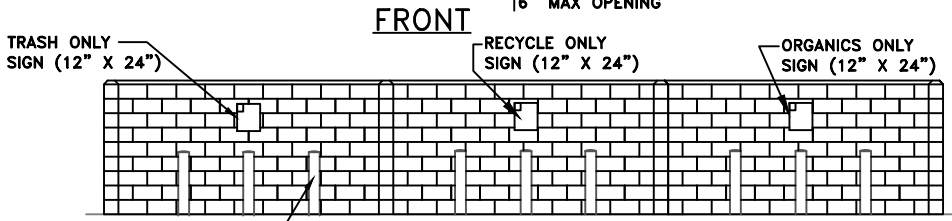

SECTION A
BOLLARD CONFIGURATION


6" x 6" #6 CONC. FILLED BOLLARDS AT 3' O.C. (3' HIGH, 3' BURIED BELOW GROUND). SEE DETAIL ST-38A



BOLLARD GATE DETAIL

Richard D. Plecker

RICHARD PLECKER
ENVIRONMENTAL UTILITIES DIRECTOR

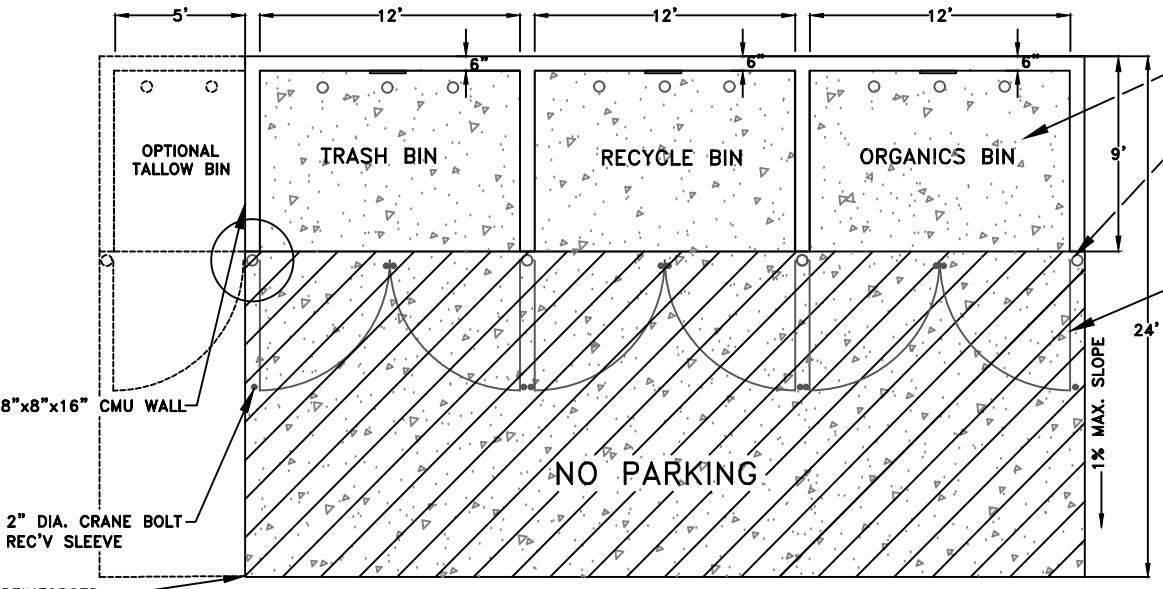

PLAN

REINFORCED CONCRETE APPROACH AND INTERIOR SHALL BE 6" THICK MIN. PAINTED "NO PARKING" 12" LETTERS WITH 4" DIAGONAL LINES



CITY OF ROSEVILLE CALIFORNIA

ENVIRONMENTAL UTILITIES DEPARTMENT

STANDARD TRASH ENCLOSURE



SCALE: NONE
REVISED: JANUARY 2023
DRAWN BY: J THOMPSON
APPROVED BY: RICHARD PLECKER

SW-1

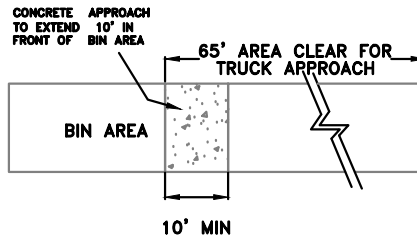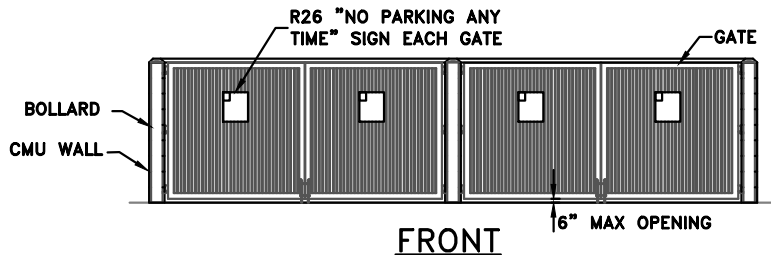


NOTES:

1. SINGLE ENCLOSURE IS 12' WIDE (INTERIOR)
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL
3. GREASE/TALLOW BIN ENCLOSURE MAY BE ATTACHED TO THE TRASH ENCLOSURE OR BE CONSTRUCTED SEPARATELY. THE GREASE/TALLOW BIN MUST NOT BE LOCATED WITHIN THE TRASH/RECYCLING ENCLOSURE.

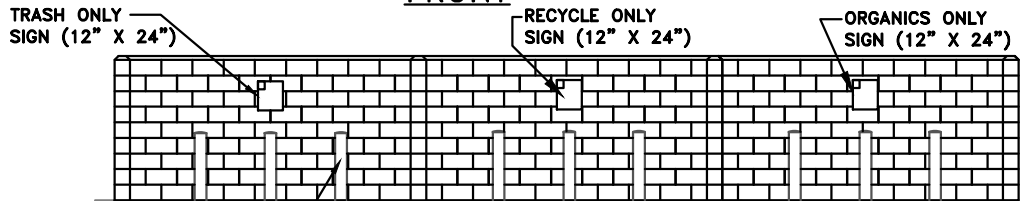


6' x 6" ϕ CONC. FILLED BOLLARDS AT 3' O.C. (3' HIGH, 3' BURIED BELOW GROUND). SEE DETAIL ST-38A



BOLLARD GATE DETAIL


Richard D. Plecker

RICHARD PLECKER
ENVIRONMENTAL UTILITIES DIRECTOR

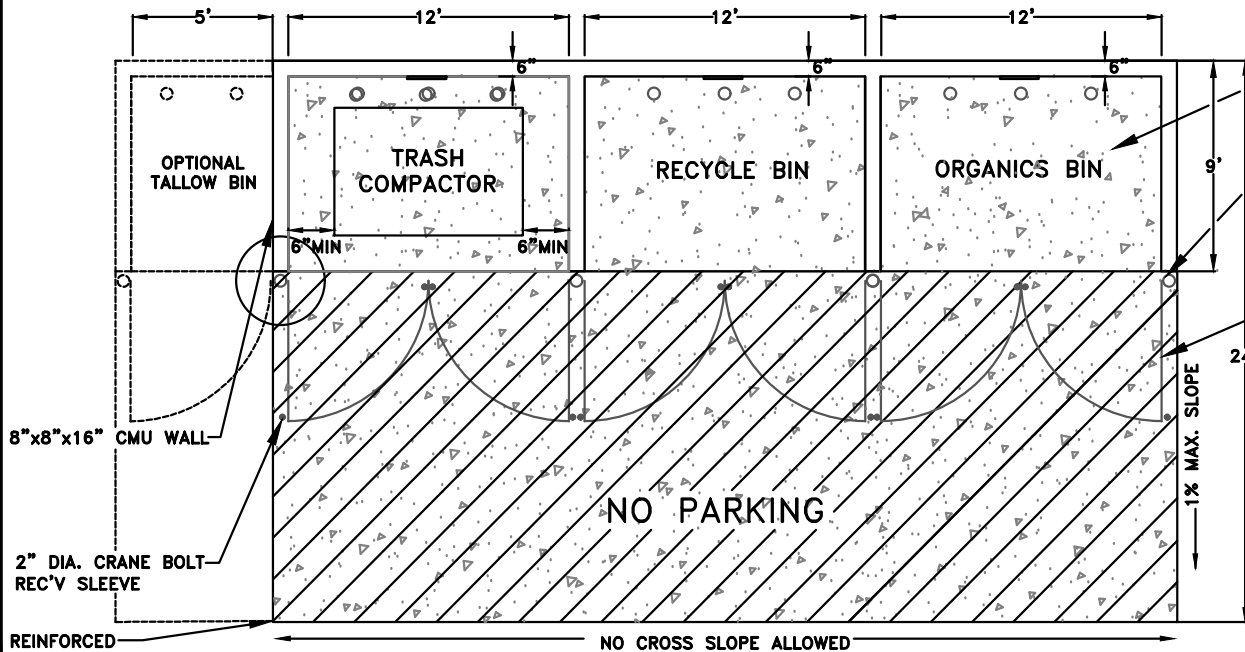


REINFORCED CONCRETE APPROACH AND INTERIOR SHALL BE 6" THICK MIN. PAINTED "NO PARKING" 12" LETTERS WITH 4" DIAGONAL LINES

	ENVIRONMENTAL UTILITIES DEPARTMENT
	FRONT LOADING COMPACTOR ENCLOSURE
SCALE: NONE REVISED: MARCH 2023 DRAWN BY: J. THOMPSON APPROVED BY: RICHARD PLECKER	SW-2

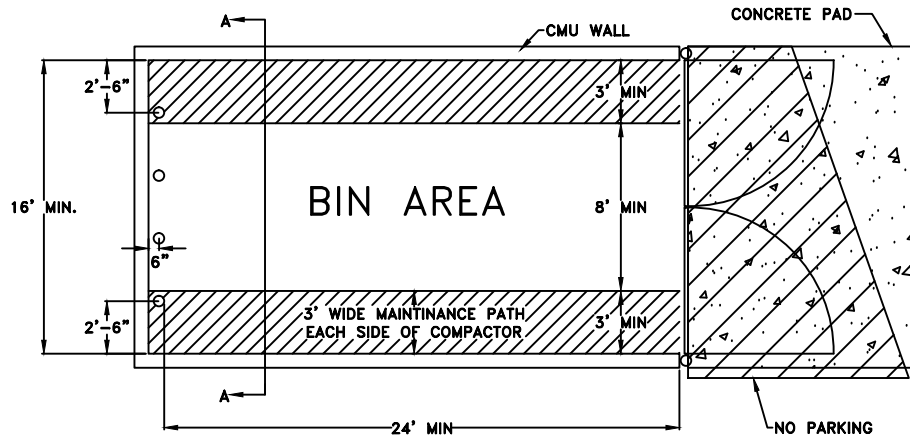


PLAN
COMPACTOR BIN

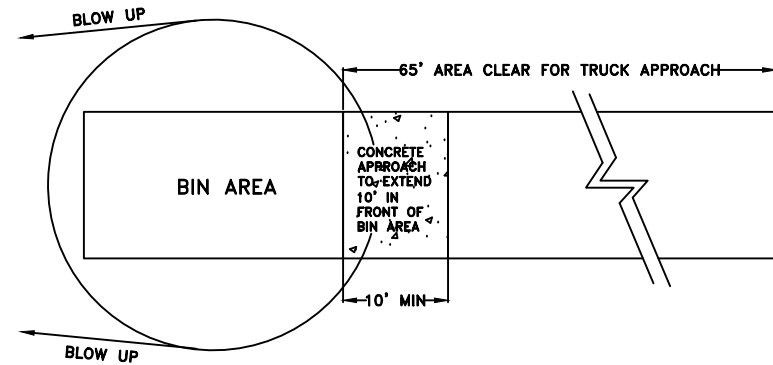


PLAN
BIN & APPROACH

NOTES:

1. APPROACH SHALL BE 6" THICK REINFORCED CONCRETE SLAB ON GRADE. IT SHALL BE PAINTED "NO PARKING" IN 12" LETTERS AND STRIPED WITH 4" DIAGONAL LINES.
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL

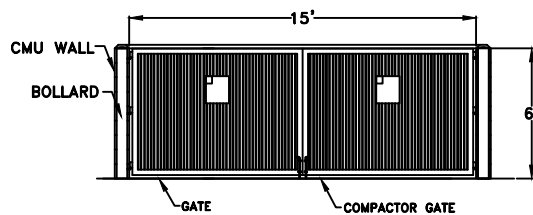

FRONT

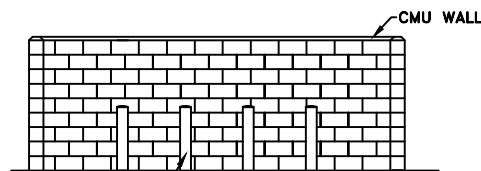

6' x 6" CONC. FILLED
BOLLARDS AT 3' O.C.
(3' HIGH, 3' BURIED
BELOW GROUND)

SECTION A
BOLLARD CONFIGURATION

ELEVATIONS

Richard D. Plecker

RICHARD PLECKER
ENVIRONMENTAL UTILITIES DIRECTOR




ENVIRONMENTAL UTILITIES
DEPARTMENT


**COMMERCIAL
COMPACTOR ENCLOSURE**

SCALE: NONE
REVISED: JANUARY 2016
DRAWN BY: R. VAN NESS
APPROVED BY: RICHARD PLECKER


SW-3

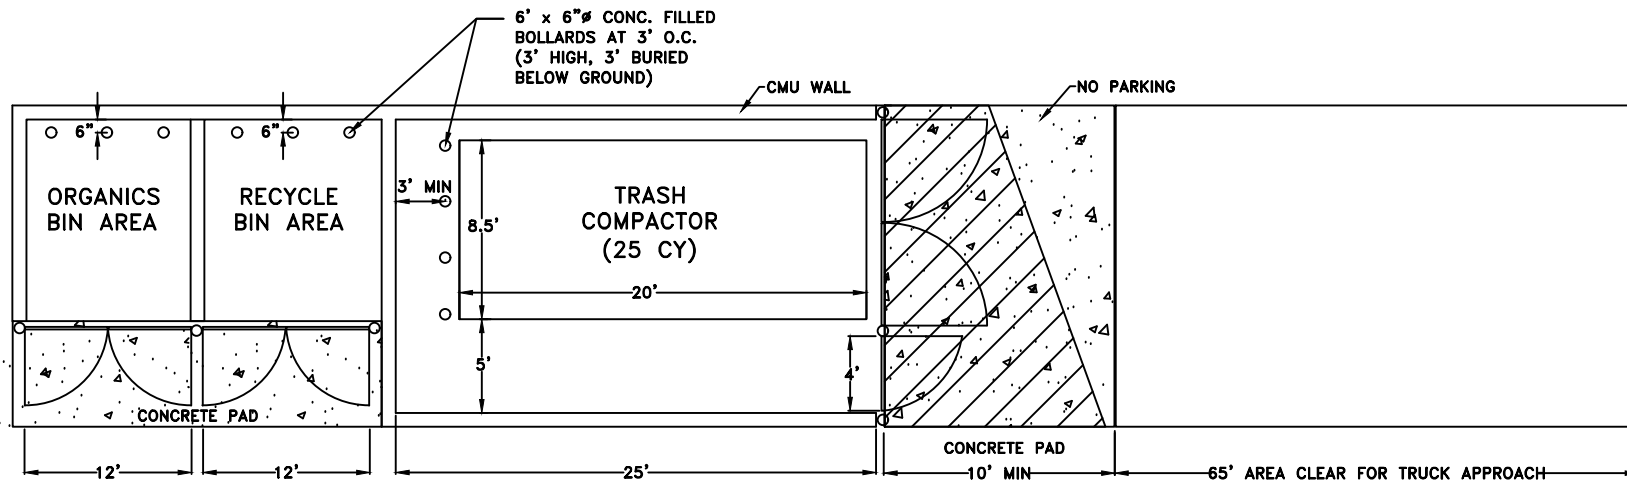


PLAN
COMPACTOR BIN

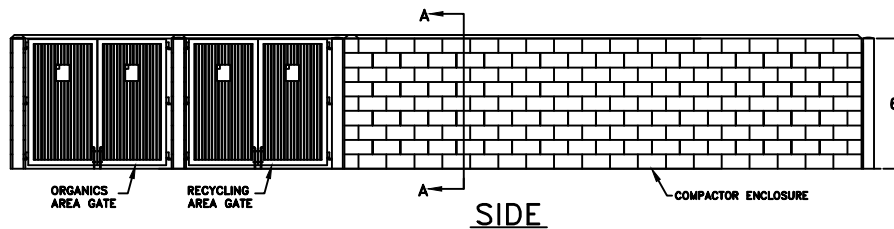

SIDE

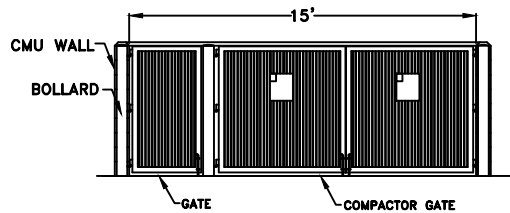

FRONT

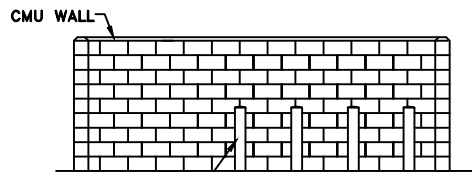

6" x 6" Ø CONC. FILLED
BOLLARDS AT 3' O.C.
(3' HIGH, 3' BURIED
BELOW GROUND)

SECTION A
BOLLARD CONFIGURATION
(TRASH COMPACTOR)

NOTES:

1. APPROACH SHALL BE 6" THICK REINFORCED CONCRETE SLAB ON GRADE. IT SHALL BE PAINTED "NO PARKING" IN 12" LETTERS AND STRIPED WITH 4" DIAGONAL LINES.
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL
3. IF GREASE/TALLOW BIN IS REQUIRED, SEE SW-1 AND SW-2 FOR DETAILS

Richard D. Plecker

RICHARD PLECKER
ENVIRONMENTAL UTILITIES DIRECTOR



ENVIRONMENTAL UTILITIES
DEPARTMENT

**RESIDENTIAL/COMMERCIAL
COMPACTOR ENCLOSURE**

SCALE: NONE
REVISED: APRIL 2022
DRAWN BY: D.SAMUELSON
APPROVED BY: RICHARD PLECKER

SW-4